



Standard-Container 20'							
		Millimeter	Foot			Kilogram	Lbs
Internal	Length	5895	19' 4 1/8"	Weight	Max. Gross	30480	67200
	Width	2350	7' 8 1/2"		Tare	2250	4960
	Height	2392	7' 10 1/8"		Max. Payload	28230	62240
Door	Width	2340	7' 8 1/8 "				
Opening					Cubic meter		Cubic foot
	Height	2292	7' 6 1/4 "	Capacity	33,2		1172



Hardtop-Container 20'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	5886	19' 3 3/4"	Weight	Max. Gross	30480	67200
	Width	2342	7' 8 1/8"		Tare	2590	5710
	Height	2375	7' 9 1/2"		Max. Payload	27890	61490
Door	Width	2336	7' 8"				
Opening					Cubic meter		Cubic foot
	Height	2280	7' 5 3/4"	Capacity	32,8		1160
Roof	Width	2208	7' 2 7/8"				
Opening							
	Length	5590	18' 4"				



Open-Top-Container 20'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	5897	19' 4 1/8"	Weight	Max. Gross	30480	67200
	Width	2350	7' 8 1/2"		Tare	2350	5180
	Height	2377	7' 9 1/2"		Max. Payload	28130	62020
Door	Width	2338	7' 8"				
Opening					Cubic meter		Cubic foot
	Height	2280	7' 5 3/4"	Capacity	32,5		1149
Roof	Width	2230	7' 3 3/4"				
Opening							
	Length	5439	17' 10 1/8"				



Flatrack-Container 20' High-Cube

		Millimeter	Foot			Kilogram	Lbs
Internal	Length floor	6038	19' 9 3/4"	Weight	Max. Gross	34000	74956
	Length min.	5612	18' 4 7/8"		Tare	2740	6040
	Width floor	2438	8' 0"		Max. Payload	31260	68910
	Width min.	2210	7' 2 7/8"				
	Height	2213	7' 3 1/8"				
	Height bottom	370	1' 2 9/16"				



Platform 20'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	6058	20'	Weight	Max. Gross	30400	74950
	Width	2438	8'		Tare	2740	6040
	Height bottom	370	1' 2 9/16"		Max. Payload	31260	68910



Ventilated Container 20'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	5895	19' 4 3/32"	Weight	Max. Gross	30480	67200
	Width	2321	7' 7 3/8"		Tare	2490	5490
	Height	2392	7' 10 1/8"		Max. Payload	27990	61710
Door	Width	2340	7' 8 1/8"				
Opening					Cubic meter		Cubic foot
	Height	2292	7' 6 1/4"	Capacity	33		1167



Refrigerated-Container 20'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	5534	18' 1 7/8"	Weight	Max. Gross	30480	67200
	Width	2316	7' 7 3/10"		Tare	3030	6680
	Height	2331	7' 7 3/4"		Max. Payload	27450	60520
Door	Width	2316	7' 7 3/16"				
Opening					Cubic meter		Cubic foot
	Height	2290	7' 6 3/16"	Capacity	29,9		1056



Standard-Container 40'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	12029	39' 5 1/2"	Weight	Max. Gross	30480	67200
	Width	2350	7' 8 1/2"		Tare	3780	8330
	Height	2392	7' 10 1/8"		Max. Payload	26700	58870
Door	Width	2340	7' 8 1/2"				
Opening					Cubic meter		Cubic foot
	Height	2292	7' 6 1/4"	Capacity	67,7		2390



Standard-Container 40' High-Cube

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	12024	39' 5 3/8"	Weight	Max. Gross	30480	67200
	Width	2350	7' 8 1/2"		Tare	4020	8860
	Height	2697	8' 10 1/8"		Max. Payload	26460	58340
Door	Width	2338	7' 8"				
Opening					Cubic meter		Cubic foot
	Height	2585	8' 5 3/4"	Capacity	76,3		2694




Hardtop-Container 40'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	12020	39' 5 1/4"	Weight	Max. Gross	30480	67200
	Width	2342	7' 10"		Tare	4700	10360
	Height	2388	7' 10"		Max. Payload	25780	56840
Door	Width	2336	7' 8"				
Opening					Cubic meter		Cubic foot
	Height	2292	7' 6 1/4"	Capacity	67,2		2374
Roof	Width	2208	7' 2 7/8"				
Opening							
	Length	11724	35' 5"				




Flatrack-Container 40'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length floor	12086	39' 7 7/8"	Weight	Max. Gross	30480	67200
	Length min.	11826	38' 9 5/8"		Tare	4200	9265
	Width floor	2224	7' 3 1/2"		Max. Payload	26280	57935
	Width min.	2224	7' 3 1/2"				
	Height	1981	6' 6"				
	Height bottom	610	2'				

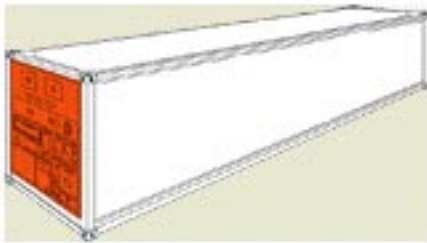

Refrigerated-Container 40'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	11563	37' 11 1/4"	Weight	Max. Gross	34000	74950
	Width	2294	7' 6 1/4"		Tare	4600	10140
	Height	2261	7' 5"		Max. Payload	29400	64820
Door	Width	2288	7' 6"				
Opening					Cubic meter		Cubic foot
	Height	2188	7' 2 1/8"	Capacity	60		2120

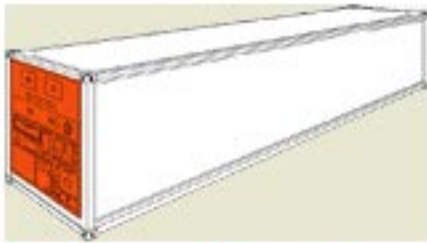

Refrigerated-Container 40' High-Cube

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	11583	38'	Weight	Max. Gross	34000	74950
	Width	2286	7' 6"		Tare	4120	9080
	Height	2532	8' 3 5/8 "		Max. Payload	29880	65870
Door	Width	2294	7' 6 1/4 "				
Opening					Cubic meter		Cubic foot
	Height	2550	8' 4 3/8 "	Capacity	67,0		2366



Flatrack-Container 40' High-Cube

		Millimeter	Foot			Kilogram	Lbs
Internal	Length floor	12060	39' 6 3/4"	Weight	Max. Gross	45000	99210
	Length min.	11660	38' 3 1/8"		Tare	5700	12570
	Width floor	2365	7' 9 1/8"		Max. Payload	39300	86640
	Width min.	2200	7' 2 5/8"				
	Height	2245	7' 4 3/8"				
	Height bottom	648	2' 1 1/2"				



Platform 40'

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	12192	40'	Weight	Max. Gross	45000	99210
	Width	2438	8'		Tare	5700	12570
	Height bottom	648	2' 1 1/2"		Max. Payload	39300	86640



Hardtop-Container 40' High-Cube

		Millimeter	Foot			Kilogram	Lbs
Internal	Length	12020	39' 5 1/4"	Weight	Max. Gross	30480	67200
	Width	2342	7' 8 1/8"		Tare	4900	10803
	Height	2693	8' 10"		Max. Payload	25580	56394
Door	Width	2336	7' 8"				
Opening					Cubic meter		Cubic foot
	Height	2597	8' 6 1/4"	Capacity	75,8		2677
Roof	Width	2208	7' 2 7/8"				
Opening							
	Length	11724	38' 5 1/2"				